

ADZ403
Automatic

ADZ403

Glass Roof Revolving Doors



Ø**3000**mm **3**Wings
Automatic **Revolving** Door



Located at the intersection of light and transparency, **Glass Roof Revolving Doors** bring the elegance of modern architecture to entrance areas.

Their all-glass structure provides visual continuity between indoor and outdoor spaces, enhancing the architectural integrity of the building.

With various diameter and entrance height options, these systems adapt to every project, offering a prestigious entrance experience with their light and bright design.

The glass-to-glass wing structure and minimal profile details ensure maximum transparency.



- • • • •
- • • • •

Ø**3000**mm **4**Wings
Manual**Revolving**Door





Standard Features

Optional Features

Technical Values	Power Supply	115V/230V ~ 50/60 hz	
	Protection Class	Engine IP55/Panel IP22	
	Working Ambient Temperature	-40 / +60 °C	
	Noise Level	Class A, Max 50 dB(A)	
Security	Radar	3 Wings Between Ø 1800 mm - Ø 3600 mm 4 Wings Between Ø 1800 mm - Ø 2600 mm One at Entry and Exit	
		4 Wings Between Ø 2601 mm - Ø 4000 mm Two at Entry and Exit	
	Emergency Stop Button	One at Entry and Exit	
	Disabled Passage Button	One at Entry and Exit	
	Handshake Wick	Standard at Entry and Exit	
	Heel Sensor	Standard	-
	Presence Sensor	-	Optional
	Curtain Sensor	-	Optional
	Broken Wing	-	Optional
	Night Shield	-	Optional
	Electromechanical Motor Lock	-	Optional
	Productivity	Air Curtain	-
Mop		Standard	-
Control System	Control Panel	Three-Position Position Switch Control Panel Standard	
	Touch Screen	4-inch Touchscreen Control Panel Optional	
Glasses	Ceiling Glass	20 mm Thick Tempered Glass	
	Wing Windows	4+4 Laminated Glass	
	Curved Glass	4+4 Laminated Glass	-
	Glass Wicks	EPDM Glass Wicks	-
	Tinted Glasses	-	Optional
Color and Covering	Colour	Standard RAL Colors and Gray Anodized	Special RAL colors and special anodizing
	Stainless Steel Coating	-	Satin, Polished, and Mirror Stainless
	Brushes	40 mm Horsehair Brushes	
	Door Handle	-	Horizontal Ø32 mm Stainless Steel Pipe, Vertical Ø40 mm Aluminum Pipe
	Ground Ring	20x40x2 mm Stainless Steel Profile	

Ø3000mm 3Wings GlassRoofAutomaticRevolvingDoor

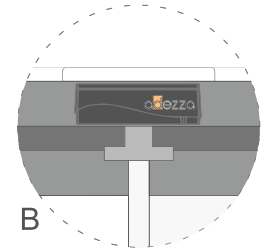
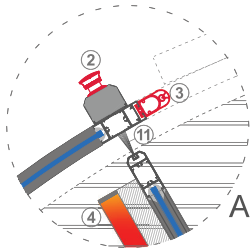


Outdoor

- ① Radar
- ② Emergency Stop Button
Disabled Button
- ③ Hand Sensor
- ④ Heel Sensor (Optional)
- ⑤ Presence Sensor (Optional)
- ⑥ Control Panel

- ⑦ Connecting Bolt
- ⑧ Bearing Set
- ⑨ 4+4 Laminated Curved Glass
- ⑩ 4+4 Laminated Flat Glass
- ⑪ Horse Hair Brush
- ⑬ Ground Ring
- ⑭ Control Unit


Interior

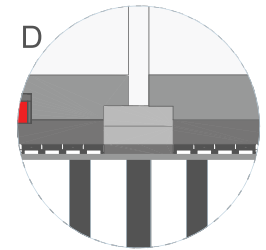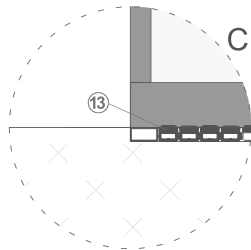

Passage Width 1374 mm

Outer Diameter Ø 3000 mm

Canopy Height	65 mm
Passage Height	2200 mm
Total Height	2265 mm

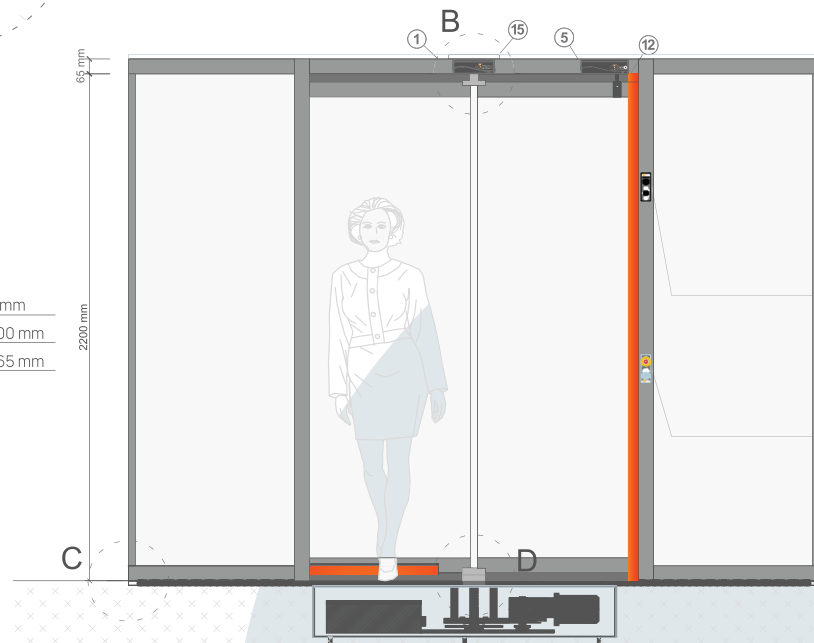

- ① Radar
- ⑮ Center Flange
- ⑤ Presence Sensor (Optional)
- ⑫ Espagnolette Lock
- ⑥ Control Panel
Warning Lights
Lighting Button
Location Switch
- ② Emergency Stop Button
Disabled Button